



50	Spessore max. del vetro indicato (es. 50 mm)					N.D. = Dimensione Non Disponibile										
	Maximum thickness of the glass (es. 50 mm)					N.D. = Dimension Not Available										
	Nota: Lo spessore massimo del vetro impiegabile si riferisce al materiale senza la camera d'aria															
Note: The maximum thickness of the glass is considered without the air-space																
Altezza anta (mm.) Sash height (mm.)	2700	50	50	43	34	29	25	21	19	17	15	14	13	12	11	10
	2600	50	50	45	36	30	26	22	20	18	16	15	13	12	12	11
	2500	50	50	47	37	31	27	23	21	19	17	15	14	13	12	11
	2400	50	50	49	39	33	28	24	22	19	18	16	15	14	13	12
	2300	50	50	50	41	34	29	26	23	20	18	17	16	14	13	12
	2200	50	50	50	43	36	31	27	24	21	19	18	16	15	14	13
	2100	50	50	50	46	38	33	28	25	23	20	19	17	16	15	14
	2000	50	50	50	48	40	34	30	27	24	22	20	18	17	16	15
	1900	50	50	50	50	42	36	32	28	25	23	21	19	18	17	15
	1800	50	50	50	50	45	39	34	30	27	24	22	20	19	18	16
	1700	50	50	50	50	48	41	36	32	29	26	24	22	20	19	18
	1600	50	50	50	50	50	44	39	34	31	28	25	23	22	20	19
	1500	50	50	50	50	50	47	41	37	33	30	27	25	23	22	16
	1400	50	50	50	50	50	50	45	40	36	32	30	27	25	18	17
	1300	50	50	50	50	50	50	49	43	39	35	32	30	21	20	18
	1200	50	50	50	50	50	50	50	47	42	38	35	25	23	22	N.D.
	1100	50	50	50	50	50	50	50	50	47	33	30	28	N.D.	N.D.	N.D.
1000	50	50	50	50	50	50	50	50	50	37	34	N.D.	N.D.	N.D.	N.D.	
900	50	50	50	50	50	50	50	50	50	50	N.D.	N.D.	N.D.	N.D.	N.D.	
800	50	50	50	50	50	50	50	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	
700	50	50	50	50	50	50	50	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	
650	50	50	50	50	50	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	
600	50	50	50	50	50	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	
550	50	50	50	50	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	
500	50	50	50	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	
	370	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	
	Larghezza anta (mm.) Sash width (mm.)															

The table has to be used as an indication for the glass thickness sizing – for more information about the tilt and turn load capacity o special application, please contact Master technical support.




Accessori per serramenti progettati per durare

Master S.r.l. | S.P. 37 Conversano-Castiglione km 0.700 | 70014 Conversano (Ba) Italy
Servizio clienti: +39 080.4959823 | www.masteronline.biz

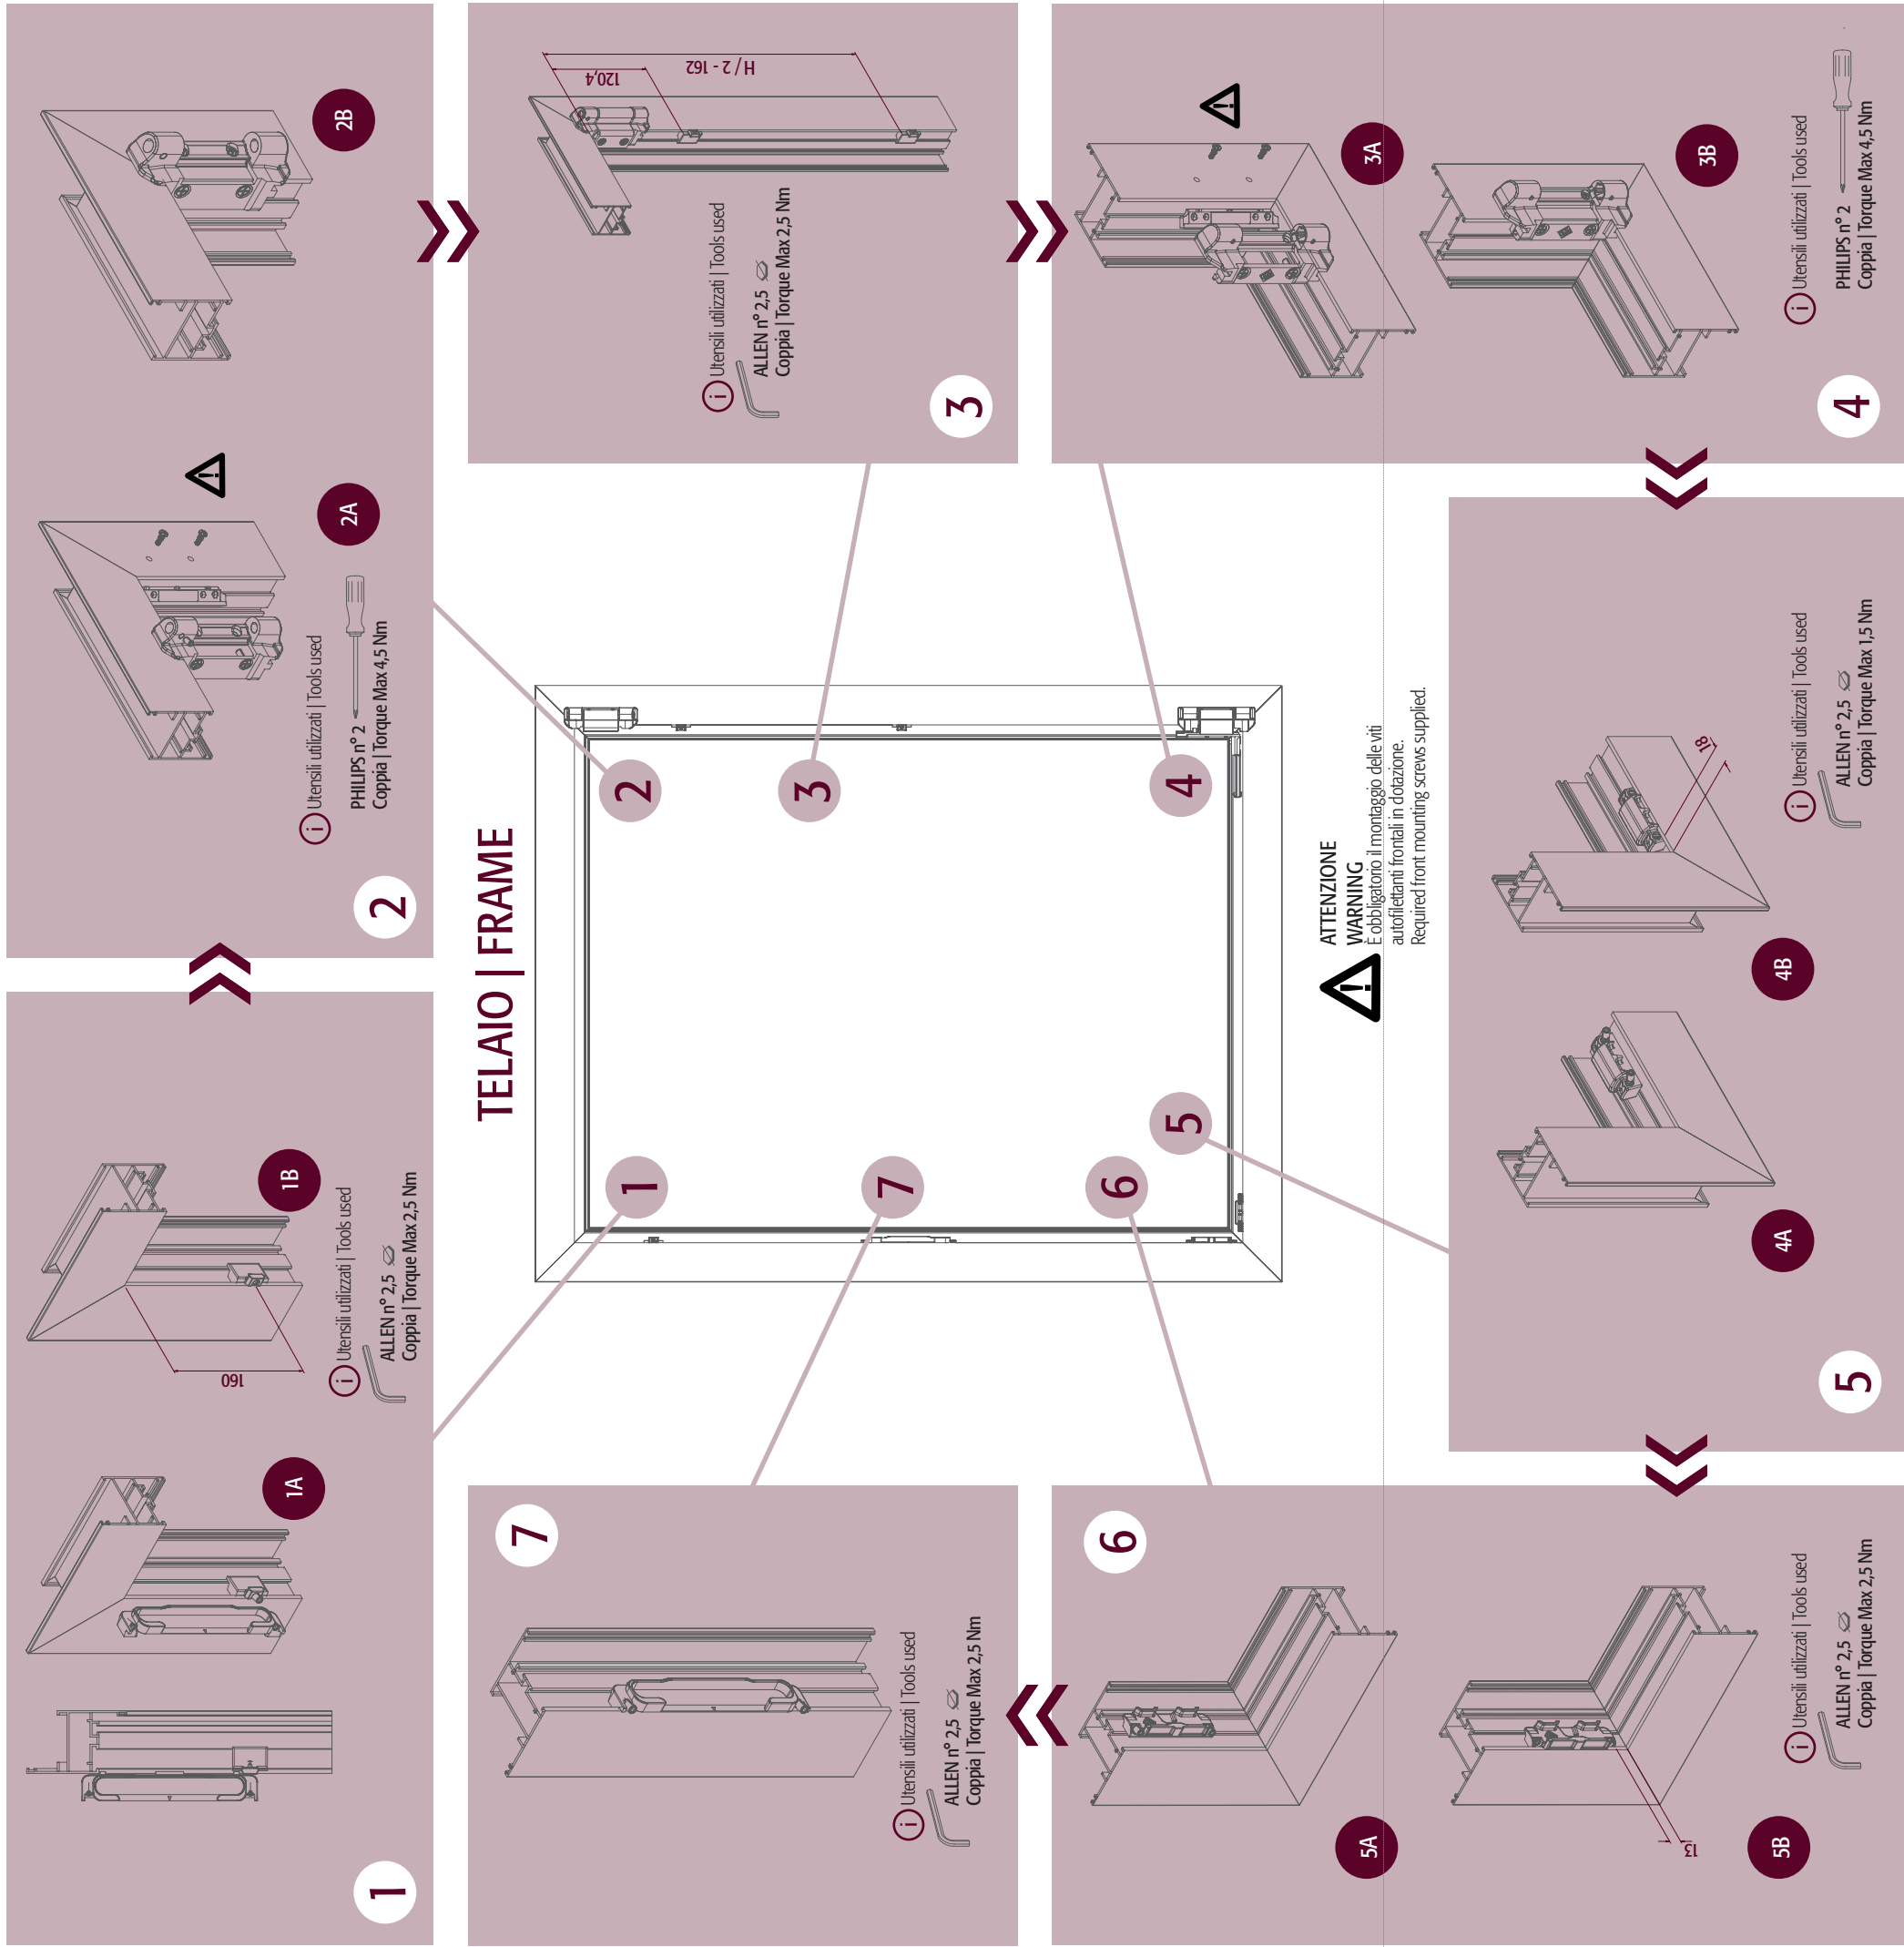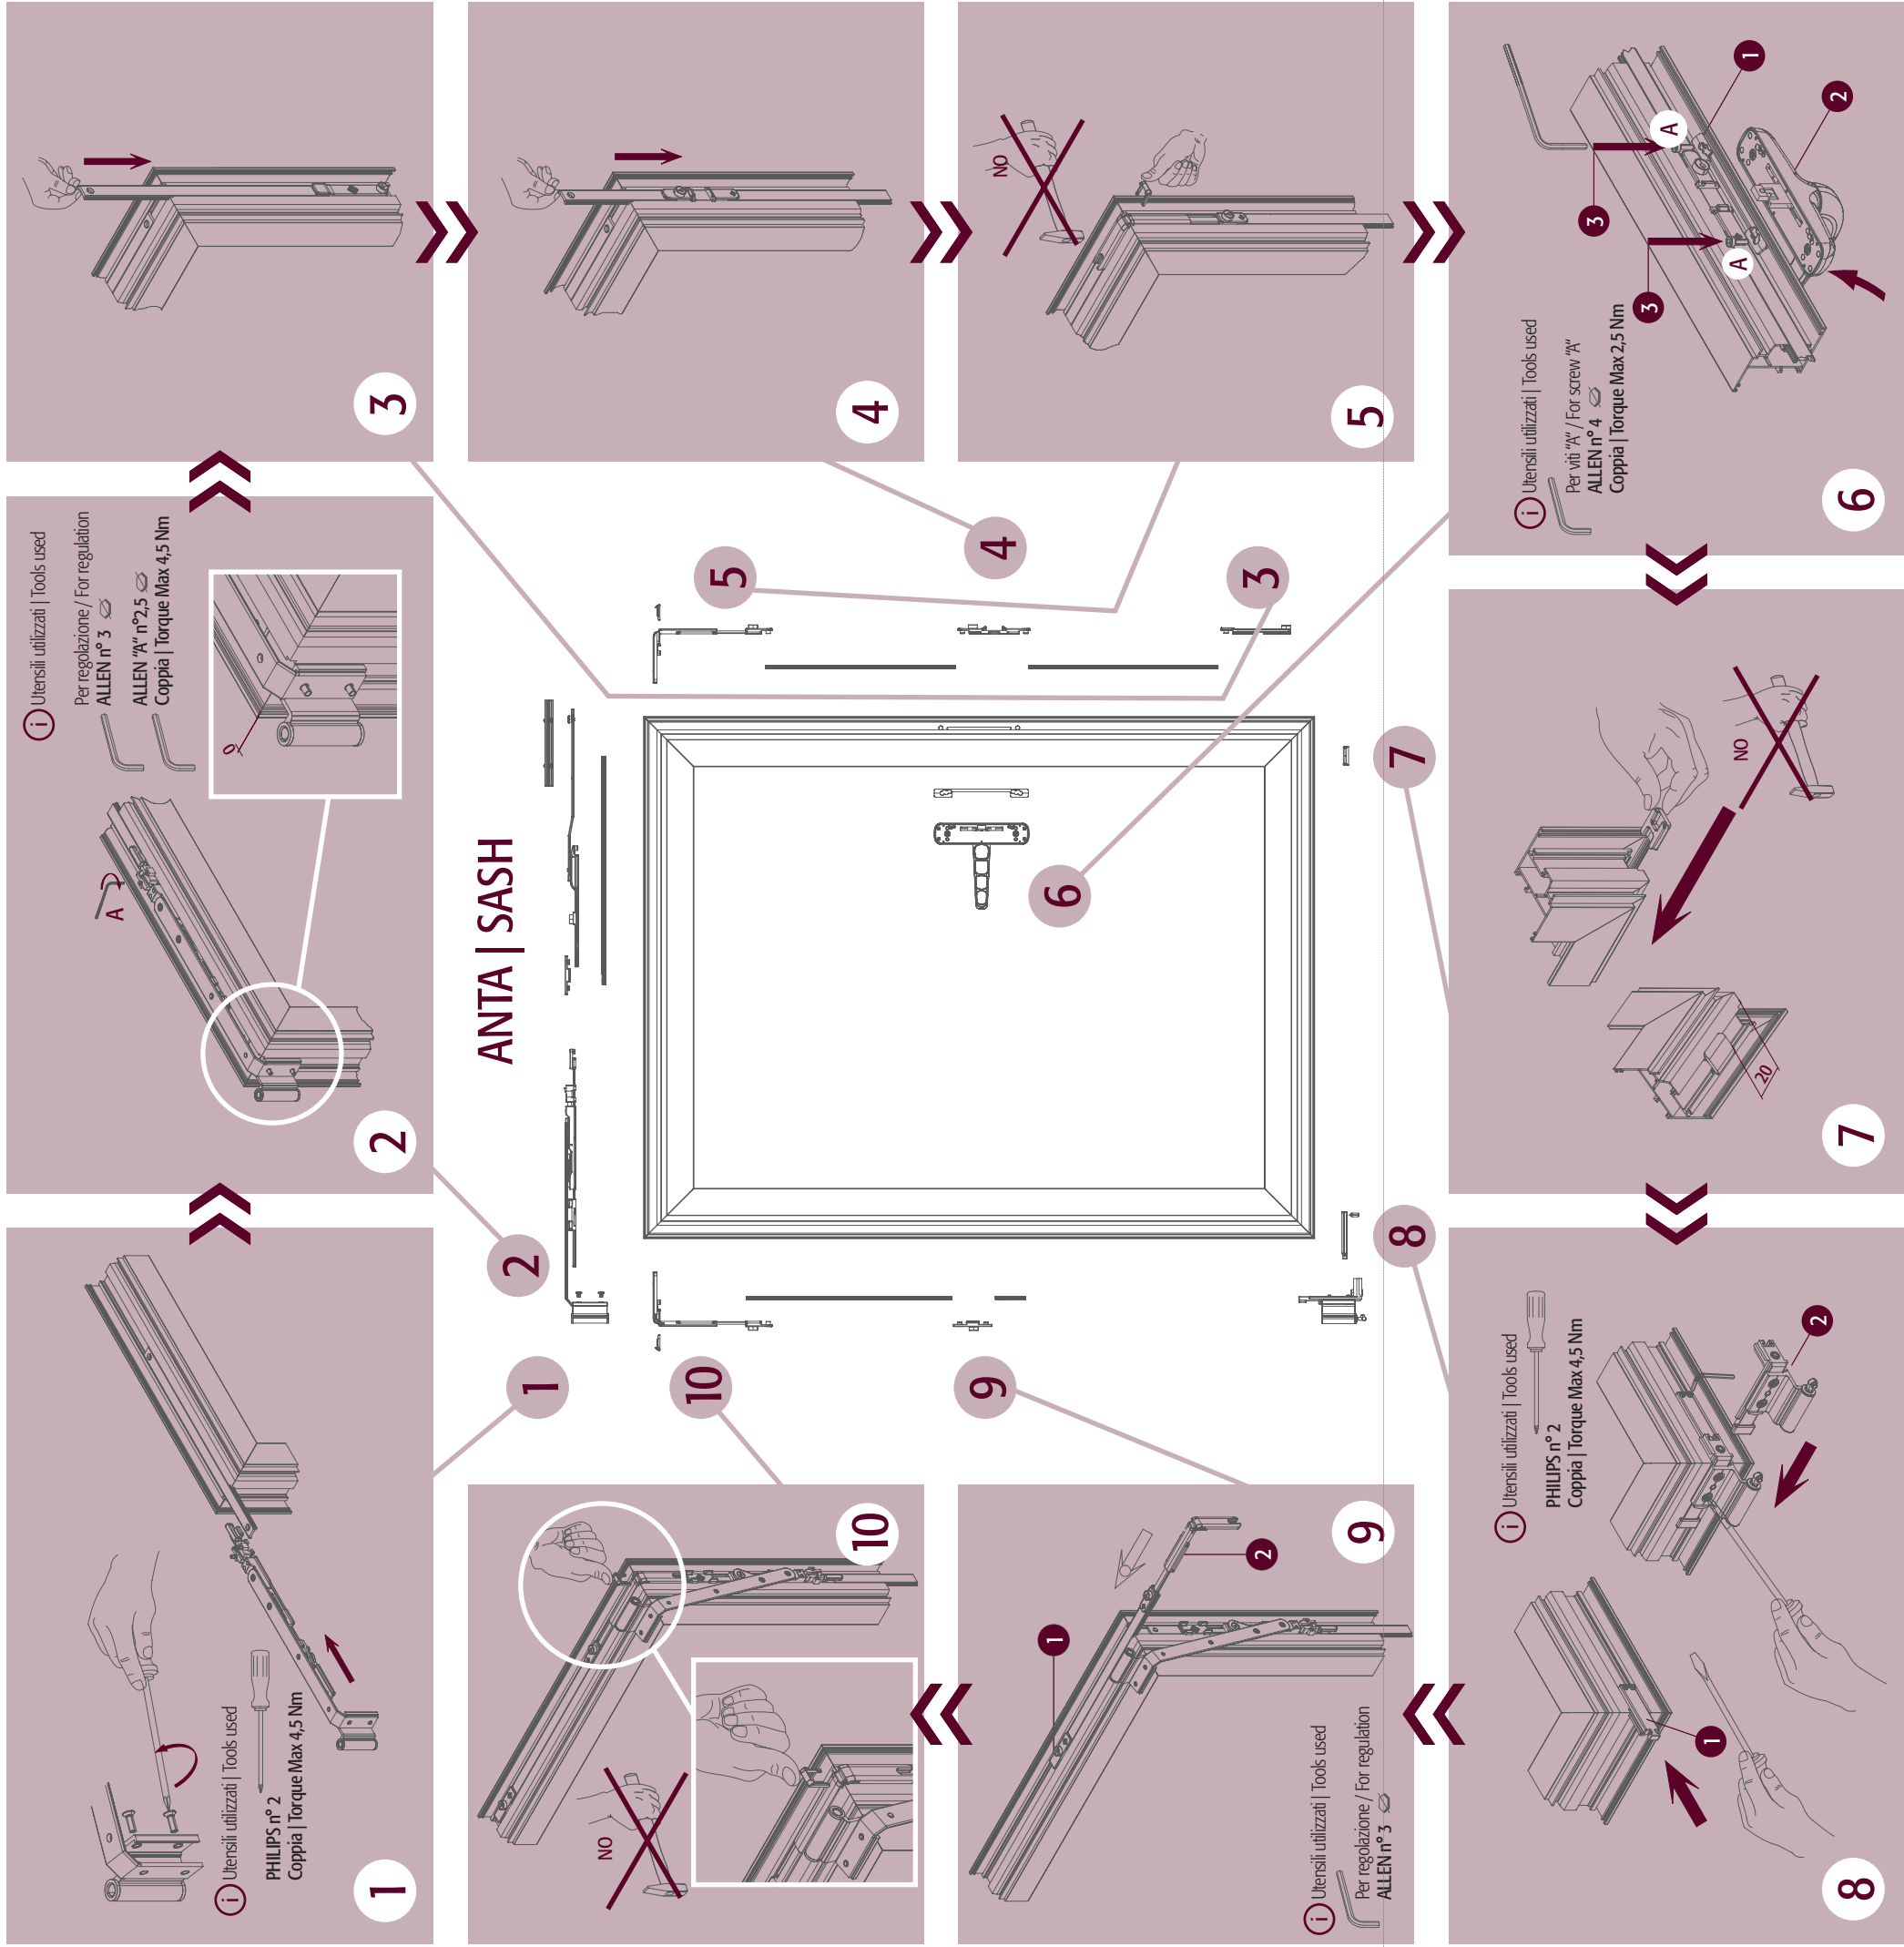

INVERSIONI DI APERTURA DX - SX DIRECTION ON OPENING OF RIGHT - LEFT

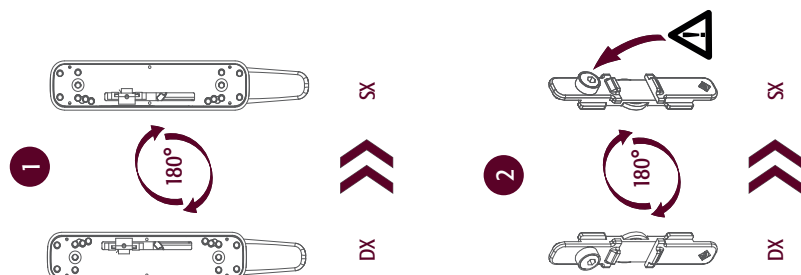

REGOLAZIONI ADJUSTMENTS

